

Design guidelines

Railway Alignment

01-10-2024



**Co-funded by
the European Union**

*The sole responsibility of this publication lies with the author.
The European Union is not responsible for any use that may be made of the information contained therein.*

Table of Contents

1.	Standards and requirement classification.....	4
2.	General rules related to geometry	5
	Design of railway alignment in correspondence with maximum operational speed.....	5
	Railway alignment in urban areas in proximity to international passenger stations	5
2.1.	Shunting limits	6
2.1.1.	Shunting limits when both tracks are straight.....	7
2.1.2.	Shunting limits when one or both tracks are curved	7
Part 1 - Mixed Traffic Line.....		9
3.	General plan characteristics.....	9
3.1.	Cant (D).....	9
3.2.	Cant excess (E)	9
3.3.	Cant deficiency (I).....	9
3.4.	Minimum radius of horizontal curve (R).....	10
3.5.	Station characteristics	10
3.6.	Cant calculation (D)	11
3.7.	Rate of change of cant (dD/dt).....	11
3.8.	Cant gradient (dD/ds).....	11
3.9.	Rate of change of cant deficiency (dI/dt)	11
3.10.	Distance between track centres.....	11
3.11.	Length of straight elements and horizontal circular curves.....	12
3.12.	Length of transition curve (L_k).....	13
3.13.	Abrupt change of cant deficiency (ΔI).....	13
4.	General vertical characteristics.....	14
4.1.	Gradient (p).....	14
4.2.	Radius of vertical curve (R_v)	15
4.3.	Length of vertical radius (L_v) and constant gradient (L_g)	15
Part 2 - Passenger only and Light Freight Traffic Line		16
5.	General plan characteristics.....	16
5.1.	Cant.....	16
5.2.	Cant excess (E)	16
5.3.	Cant deficiency (I).....	16
5.4.	Minimum radius of horizontal curve (R).....	17

5.5.	Station characteristics	17
5.6.	Cant calculation (D)	18
5.7.	Rate of change of cant (dD/dt).....	18
5.8.	Cant gradient (dD/ds).....	18
5.9.	Rate of change of cant deficiency (dI/dt).....	18
5.10.	Distance between track centres.....	18
5.11.	Length of straight elements and horizontal circular curves.....	18
5.12.	Length of transition curve (L_K).....	19
5.13.	Abrupt change of cant deficiency (ΔI).....	19
6.	General vertical characteristics.....	20
6.1.	Gradient (p).....	20
6.2.	Radius of vertical curve (R_V).....	21
6.3.	Length of vertical radius (L_V) and constant gradient (L_g).....	21

1. Standards and requirement classification

European Standards to be considered are the following:

Standard	Title
EN 13803	Railway applications - Track - Track alignment design parameters - Track gauges 1435mm and wider
Commission Regulation (EU) N° 1299/2014 of 18 November 2014 – Infrastructure TSI	Technical Specifications for Interoperability relating to the infrastructure subsystem of the rail in the European Union.

For alignment, different values are defined in this document and these values shall be read considering following guidance:

Nominal Values

The nominal values correspond to the recommend values commonly used by designers in the absence of any special constraints.

Limited Values

The limited values represent maximum (or minimum) values to which designers must adhere as a priority.

Exceptional Values

The exceptional values are extreme values that must be used as rarely as possible and only under highly restricted conditions where limited values will not achieve an acceptable solution. Usage of these values that may lead to a deterioration in comfort and maintenance conditions must be clearly justified by significant issues and must require systematic change. Any usage of exceptional values in the design process requires ex-ante approval of RB Rail.

2. General rules related to geometry

Element limitation

For better freight train operations and passenger comfort, the number of vertical elements is recommended to be limited to 4 per sliding kilometre (vertical curves or slopes with constant gradient) and recommended minimum distance between sag and crest of vertical profile is 600m.

Horizontal and vertical interference

Overlapping of vertical curves with horizontal transition curves or turnouts is not recommended. Turnouts shall not overlap with vertical curves in case if the design speed is higher than 200 km/h.

In case of overlapping of horizontal transition curves or turnouts with vertical curves the radius of vertical curve shall be recommended value or higher.

At main tracks minimum recommended distance between start/end of horizontal element and start/end of vertical element is 30m.

Maximum radius value

For practical reasons curve values are limited:


- The maximum horizontal curve is limited to **25 000m**
- The maximum vertical curve is limited to **40 000m**

Design of railway alignment in correspondence with maximum operational speed

Railway alignment, including station layouts, should be designed as straight as possible.


Railway alignment in urban areas in proximity to international passenger stations

In case if in urban areas due to technical, environmental or other constraints minimum allowed value of horizontal radius cannot be provided, speed limit may be introduced. The speed limit shall follow typical braking curve of passenger trains.

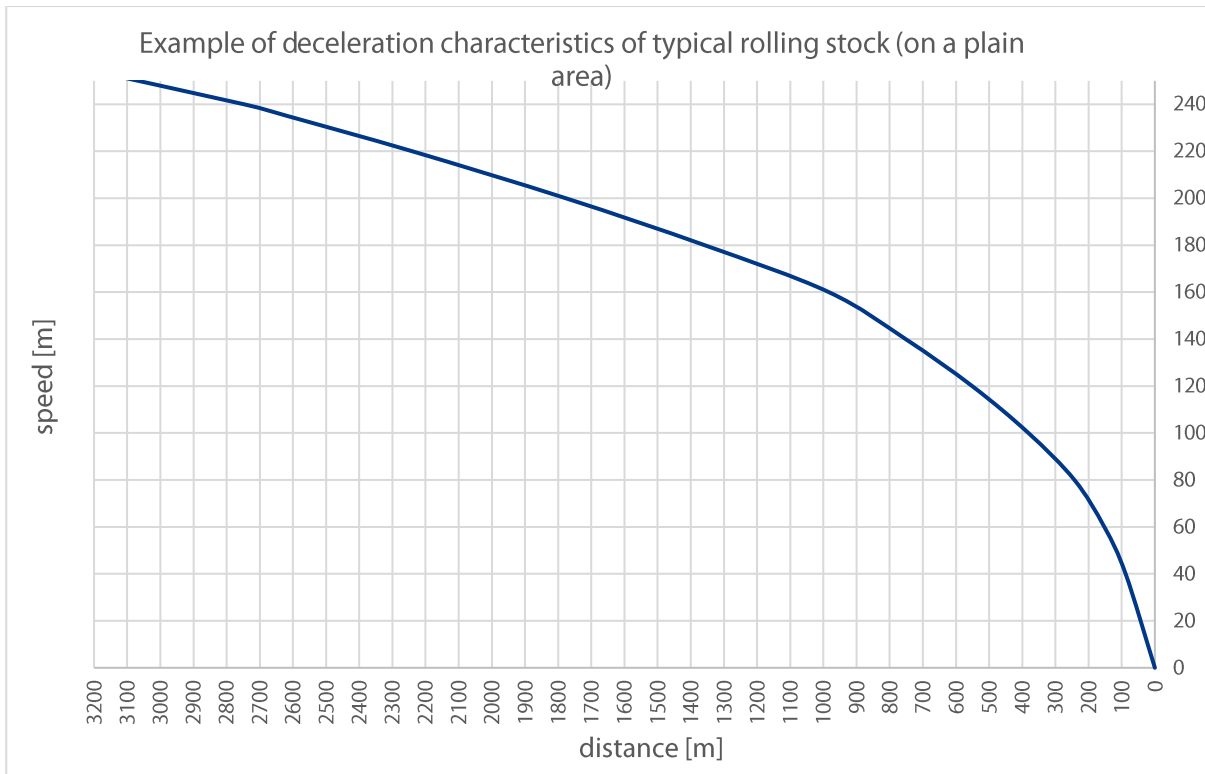

2.1. Shunting limits

Shunting limit defines the safe distance between two converging tracks thus prohibiting usage of the converging track sections from the shunting limit to the heel joint of turnout.

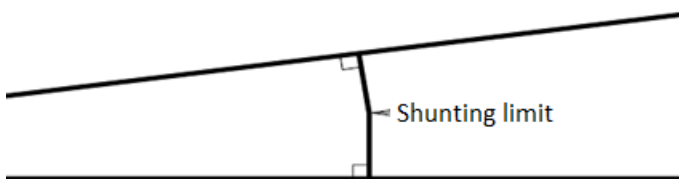

2.1.1. Shunting limits when both tracks are straight

2.1.1.1. Passenger and light traffic sections designed for GC gauge

In turnout areas of passenger and light freight traffic sections designed to GC gauge, the shunting limits shall be located at places where distance between straight tracks axis is at least 3,60 m.


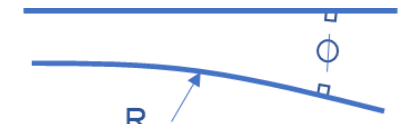


2.1.1.2. Mixed traffic sections designed for SEc gauge

At mixed traffic sections designed to SEc gauge, the shunting limits shall be located at places where distance between straight tracks axis is at least:

- 4,10 m between main tracks and between main track and side track
- 3,90 m between side tracks

2.1.2. Shunting limits when one or both tracks are curved

In case one or both of the tracks are curved, widening due to horizontal radius and cant shall be added according to the rules set Table 1 below.

Track Layout	Distance between track centres at shunting limits
	Basic distance S
	$S + U_y$
	$S + U_i + 3,2 * h$
	$S + U_i + U_y + 3,2 * (h_1 - h_2)$

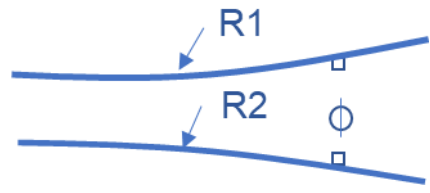
	$S + 2 * U_y$
---	---------------

TABLE 1

Where:

[S] basic distance as below:

For GC gauge sections, $S = 3,60$ m

For SEc gauge sections:

between main tracks and between main track and side track, $S = 4,10$ m

between side tracks, $S = 3,90$ m

and,

Internal overthrow $U_i = 40,5/R$ (Radius R in meter)

External overthrow $U_y = 31,5/R$ (Radius R in meter)

and,

h - cant

h1 - cant in curve R1

h2 - cant in curve R2

the term $(h_1 - h_2)$ is used only when $h_1 > h_2$

Part 1 - Mixed Traffic Line

Mixed traffic line parameters:

- Passenger trains: $V = 249\text{km/h}$
- Freight trains: $V = 120\text{km/h}$

3. General plan characteristics

3.1. Cant (D)

The limited value for cant (maximum cant) is 90mm.

The exceptional value is 110mm (for exceptional values use, refer to chapter 1).

3.2. Cant excess (E)

The limited value for cant excess (E) (maximum cant excess) is 90mm.

The exceptional value is 105mm (for exceptional values use, refer to chapter 1).

3.3. Cant deficiency (I)

The limited value for cant deficiency (I) (maximum cant deficiency) is 100mm.

The exceptional value is 115mm (for exceptional values use, refer to chapter 1).

3.4. Minimum radius of horizontal curve (R)

The radii of curves on main tracks are determined according to the combination of requirements for the values of track cant (D), cant deficiency (I), cant excess (E) and for lengths of circular and transition curves

The minimal radius of horizontal curve is given by the formula:

$$R_{min} = \frac{11.8(V_{max}^2 - V_{minfreight}^2)}{E + I}$$

Where:

- $V_{max} = 249\text{km/h}$
- $V_{min\ freight} = 100\text{km/h}$ (speed of the slowest freight train)
- $E = 90\text{mm}$
- $I = 100\text{mm}$

- The nominal minimum radius is recommended to be **4 000m**.
- The limited minimum value is **3 600m**.

Note: For sections with only freight traffic, the exceptional minimum radius is given by the formula:

$$R_{min.freight} = \frac{11.8 V_{freight}^2}{D + I}$$

- $V_{freight} = 120\text{km/h}$
- $D = 90\text{mm}$
- $I = 100\text{mm}$

- The recommended minimum radius for sections with only freight is $R_{min}(\text{freight}) = 900\text{m}$.

Absolute minimum value of radius (not on main tracks) is 300m and exceptional value is 150m.

Note: In case reverse curves with radii in the range from 150m up to 300m occurs, TSI INF (4.2.3.4) applies.

3.5. Station characteristics

Station design shall be in compliance with following rules:

- Passenger station shall be placed on straight sections, passenger platforms on curves shall be avoided
- If curve cannot be avoided at passenger platform due to geometrical constraints, minimum radius 1000m shall be respected
- Inclined rails (cant) in stations shall be implemented if some trains do not stop to the platform - if all the trains stop to the platform it is preferable to have flat rail. At station platforms, cant is limited to 70mm.

- For stations that are dedicated for stopping of all passenger trains it is recommended to provide design speed at least 120 km/h through the station.

3.6. Cant calculation (D)

Cant in any curve shall be selected in particular by considering following parameters:

- Design speed of passenger trains.
- Design speed of the slowest freight train
- Possibility to increase cant in the future.

The following formula is proposed for cant (D) calculation:

$$\frac{11,8 \times V_{max}^2}{R} - I \leq D \leq \frac{11,8 \times V_{min\ freight}^2}{R} + E$$

Where:

- $V_{max} = 249\text{km/h}$
- $V_{min\ freight} = 100\text{km/h}$
- $E = 90\text{mm}$
- $I = 100\text{mm}$

Note: In case curves with radius less than 305m occurs, EN 13803 standard and TSI INF (4.2.4.2) applies.

3.7. Rate of change of cant (dD/dt)

The rate of change of cant (dD/dt) is limited to 30 mm/s.

3.8. Cant gradient (dD/ds)

The maximum cant gradient (dD/ds) is 2,5 mm/m.

3.9. Rate of change of cant deficiency (dl/dt)

The rate of change of cant deficiency (dl/dt) is limited to 30 mm/s.

3.10. Distance between track centres

On mixed traffic section with 249km/h maximum design speed, the minimum distance between track centres is **4,5m**.

Note 1: On section with only freight traffic, the minimum distance between track centres could be reduced to 4,0m.

Note 2: For very small radius i.e. less than 300m, specific studies about track gauge and distance between track centres shall be prepared for RB Rail approval.

3.11. Length of straight elements and horizontal circular curves

At main tracks, minimum length of straight elements and horizontal circular curves given in meters shall adhere to the following limits:

- Recommended value: $L \geq V_{\max}/1,2$
- Limited value: $L \geq V_{\max}/1,5$
- Exceptional value: $L \geq V_{\max}/2$ (for exceptional values use, refer to chapter 1)

Note: V_{\max} is inserted in definite units (km/h).

3.12. Length of transition curve (L_K)

Connection between straight alignment and circular curves is performed with transition curves always when track design speed is higher than 40 km/h. The transition curves are clothoids with a constant variation of curvature and cant. Absolute minimum length of transition curves is 20m.

The length of the transition curve (L_{tc}) is calculated and shall be the highest value of the following three calculations:

Calculation 1

The first possible transition curve length is determined by the formula:

$$L_{K1} = \frac{D}{\left(\frac{dD}{ds}\right)}$$

Where:

- L_{K1} - required length of track cant gradient (m)
- D - track cant within curve (mm)
- dD/ds - cant gradient = 2,5 mm/m.

Calculation 2

The length of transition curve obtained above is checked for the rate of cant with the second formula:

$$L_{K2} = \frac{D V_{max}}{3,6 \left(\frac{dD}{dt}\right)}$$

Where:

- L_{K2} - required length of track in accordance with wheel rise speed (m)
- D – track cant within curve (mm)
- V_{max} - maximum speed (km/h)
- dD/dt - rate of change of cant (30 mm/s)

Calculation 3

The length of transition curve obtained above is checked for the rate of cant deficiency with the third formula:

$$L_{K3} = \frac{I V_{max}}{3,6 \left(\frac{dI}{dt}\right)}$$

Where:

- L_{K3} - required length of track in accordance with wheel rise speed (m)
- I – cant deficiency within curve (mm)
- V_{max} - maximum speed (km/h)
- dI/dt – rate of change of cant deficiency (30 mm/s)

3.13. Abrupt change of cant deficiency (ΔI)


In case of an abrupt change of cant deficiency occurs, EN 13803 standard and TSI applies. EN 13803 normal values should be followed. Usage of exceptional values are possible, their implementation is described in Chapter 1.

4. General vertical characteristics

4.1. Gradient (p)

For the purpose of gradient definition, 3 distinct areas are defined:

- The Station area, which includes all tracks up to the external crossovers,
- The Station Approach area, which includes tracks from the limit of the Station area up to 2000 m in the direction of the Open Line,
- The Open Line area, which includes tracks between 2 Station Approach areas,

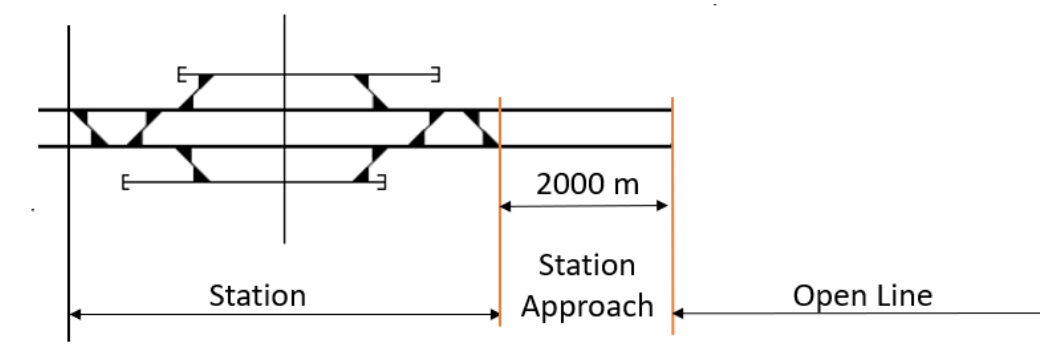

The case of Regional stops located in Open Line areas is also foreseen.

Open line

- Nominal gradient limit is **8‰**.
- Gradient up to **10‰** is accepted and shall not be exceeded as an average value over 1km length of track.
- Maximum gradient limit is **12,5‰**.

Station

- The nominal gradient limit is **0‰**.
- The maximum gradient limit is **1,5‰**.
- The exceptional gradient limit is **2,5‰** (for exceptional values use, refer to chapter 1).
- For dead-end parking tracks, it is recommended to apply a gradient of **1‰** with the low point located on the buffer stop side.

Station Approach

- The nominal gradient limit is **5‰**.
- The exceptional gradient limit is **8‰**.

Regional stops in Open line area

- The maximal gradient limit is 5 ‰.

Note: Regional stop located in Open Line area is a passenger stop, with lateral platforms without any stabling tracks (no parking of the rolling stock allowed), where no coupling operations are possible (vehicles are not intended to be attached or detached).

4.2. Radius of vertical curve (R_V)

- Recommended value $R_V = 0,6 V_{\max}^2$
- Minimum value $R_V = 0,35 V_{\max}^2$
- Exceptional value $R_V = 0,25 V_{\max}^2$

Two tangents need to be connected with circular vertical curve (not parabolic) if the value of abrupt change of track gradient is higher than upper limits described in EN 13803.

The absolute minimum radius of vertical curve is the following:

- Minimum value for main tracks 10 000m.
- Minimum value for other tracks 2000m.

4.3. Length of vertical radius (L_V) and constant gradient (L_g)

Minimum length of vertical radius and constant gradient is:

- Nominal value $V_{\max}/2$
- Minimum value $V_{\max}/2,5$
- Exceptional absolute minimum value 30m (for exceptional values use, refer to chapter 1)

In dead-end tracks, with design speed of 50 km/h or lower, EN 13803 standard 6.16 requirements should be followed.

Part 2 - Passenger only and Light Freight Traffic Line

Maximum design speed for passenger trains is 249km/h.

5. General plan characteristics

5.1. Cant

The limited value for cant (maximum cant) is 160mm.
The exceptional value is 180mm (for exceptional values use, refer to chapter 1).

5.2. Cant excess (E)

The limited value for cant excess (E) (maximum cant excess) is 90mm.
The exceptional value is 110mm (for exceptional values use, refer to chapter 1).

5.3. Cant deficiency (I)

The limited value for cant deficiency (I) (maximum cant deficiency) is 110mm.
The exceptional value is 130mm (for exceptional values use, refer to chapter 1).

5.4. Minimum radius of horizontal curve (R)

The radii of curves are determined according to the combination of requirements for the values of track cant and cant deficiency, for lengths of circular and transition curves

The Exceptional minimal radius of horizontal curve is given by the formula:

$$R_{min} = \frac{11.8 V_{max}^2}{D + I}$$

Where:

- V_{max} in km/h
- $D = 160\text{mm}$
- $I = 110\text{mm}$

- The nominal minimum radius is recommended to be **4 000m**.
- The limited minimum value is **3 600m**.

Absolute minimum values of radius (not on main tracks) is 300m and exceptional value is 150m.

Note: In case reverse curves with radii in the range from 150m up to 300m occurs, TSI (4.2.3.4) applies.

5.5. Station characteristics

Station design shall be in compliance with following rules:

- If curve cannot be avoided at platforms due to geometrical constraints, minimum radius of 1000m shall be respected
- Inclined rails (cant) in stations shall be implemented if some trains do not stop to the platform - if all the trains stop to the platform it is preferable to have flat rail. In station platforms, cant is limited to 70mm.
- For stations that are dedicated for stopping of all the passenger trains it is recommended to provide design speed at least 120 km/h through the station.

5.6. Cant calculation (D)

Cant calculation formula:

- Cant (D) = $11,8 V^2/R$ with V in km/h.

V is defined as average weighted actual speed of rolling stock.

5.7. Rate of change of cant (dD/dt)

The rate of change of cant (dD/dt) is limited to 45 mm/s.

5.8. Cant gradient (dD/ds)

The maximum cant gradient (dD/ds) is 2,5 mm/m.

5.9. Rate of change of cant deficiency (dI/dt)

The rate of change of cant deficiency (dI/dt) is limited to 45 mm/s.

5.10. Distance between track centres

On passenger only and light freight traffic section with 249km/h maximum design speed, the minimum distance between track centres is **4,5m**.

On only passenger traffic section with 200km/h maximum design speed, the minimum distance between track centres is **3,80 m** with a preferred value of **4,00 m**.

Note: For very small radius i.e. less than 300m, specific studies about track gauge and distance between track centres shall be prepared for RB Rail approval.

At sections where the minimum distance between track centres is less than 4,00 m, no turnout shall be installed.

5.11. Length of straight elements and horizontal circular curves

For main tracks, minimum length of straight elements and horizontal circular curves given in meters shall adhere to the following limits:

- Limited value: $L \geq V/2$
- Exceptional value: $L \geq V/3$ (for exceptional values use, refer to chapter 1)

with V = 249km/h

5.12. Length of transition curve (L_K)

Connection between straight alignment and circular curves is performed with transition curves always when track design speed is higher than 40 km/h. The transition curves are clothoids with a constant variation of curvature and cant. Absolute minimum length of transition curves is 20m.

The length of the transition curve (L_{tc}) is calculated and shall be the highest value of the following three calculations:

Calculation 1

The first possible transition curve length is determined by the formula:

$$L_{K1} = \frac{D}{\left(\frac{dD}{ds}\right)}$$

Where:

- L_{K1} - required length of track cant gradient (m)
- D - track cant within curve (mm)
- dD/ds - cant gradient = 2,5 mm/m.

Calculation 2

The length of transition curve obtained above is checked for the rate of cant with the second formula:

$$L_{K2} = \frac{D V_{max}}{3,6 \left(\frac{dD}{dt}\right)}$$

Where:

- L_{K2} - required length of track in accordance with wheel rise speed (m)
- D – track cant within curve (mm)
- V_{max} - maximum speed (km/h)
- dD/dt - rate of change of cant (45 mm/s)

Calculation 3

The length of transition curve obtained above is checked for the rate of cant deficiency with the third formula:

$$L_{K3} = \frac{I V_{max}}{3,6 \left(\frac{dI}{dt}\right)}$$

Where:

- L_{K3} - required length of track in accordance with wheel rise speed (m)
- I – cant deficiency within curve (mm)
- V_{max} - maximum speed (km/h)
- dI/dt – rate of change of cant deficiency (45 mm/s)

5.13. Abrupt change of cant deficiency (ΔI)


In case of an abrupt change of cant deficiency occurs, EN 13803 standard and TSI applies. EN 13803 normal values should be followed. Usage of exceptional values are possible, their implementation is described in Chapter 1.

6. General vertical characteristics

6.1. Gradient (p)

For the purpose of gradient definition, 3 distinct areas are defined:

- The Station area, which includes all tracks up to the external crossovers,
- The Station Approach area, which includes tracks from the limit of the Station area up to 2000 m in the direction of the Open Line,
- The Open Line area, which includes tracks between 2 Station Approach areas,

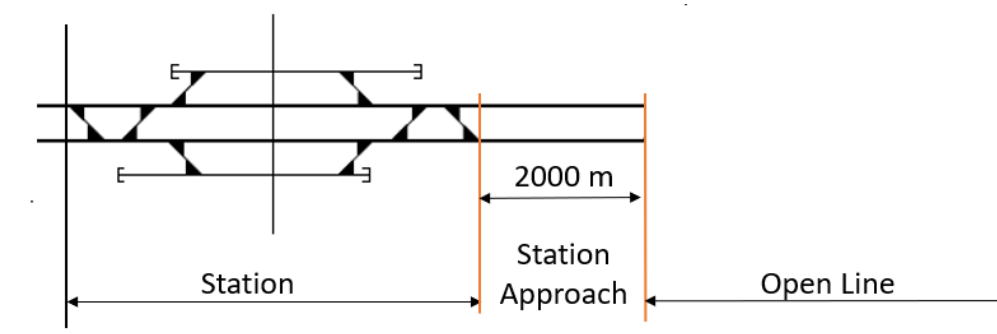

The case of Regional stops located in Open Line areas is also foreseen.

Open line

- The nominal gradient limit is 15‰.
- The maximum gradient limit is 25‰.

Station

- The nominal gradient limit is 0‰.
- The maximum gradient limit is 1,5‰.
- The exceptional gradient limit is 2,5‰ (for exceptional values use, refer to chapter 1).
- For dead-end parking tracks, it is recommended to apply a gradient of 1 ‰ with the low point located on the buffer stop side.

Station Approach

- The nominal gradient limit is 8 ‰.
- The exceptional gradient limit is 25 ‰.

Regional stops in Open line area

- The maximal gradient limit is 5 ‰.

Note: Regional stop located in Open Line area is a passenger stop, with lateral platforms without any stabling tracks (no parking of the rolling stock allowed), where no coupling operations are possible (vehicles are not intended to be attached or detached).

6.2. Radius of vertical curve (R_V)

- Recommended value $R_V = 0.6 V_{\max}^2$
- Minimum value $R_V = 0.35 V_{\max}^2$
- Exceptional value $R_V = 0.25 V_{\max}^2$

Two tangents need to be connected with circular vertical curve (not parabolic) if the value of abrupt change of track gradient is higher than upper limits described in EN 13803.

The absolute minimum radius of vertical curve is the following:

- Minimum value for main tracks **10 000m**.
- Minimum value for other tracks is **2000m**.

6.3. Length of vertical radius (LV) and constant gradient (Lg)

Minimum length of vertical radius and constant gradient is:

- Nominal value $V_{\max}/2$
- Minimum value $V_{\max}/2,5$
- Exceptional absolute minimum value 30m (for exceptional values use, refer to chapter 1)

In dead-end tracks, with design speed of 50 km/h or lower, EN 13803 standard 6.16 requirements should be followed.