


Twinning with high traffic roads
Roadway at least 3m lower than the railway


Limit of the railway installations :
Outer drainage limit
or ridge of the cut-off slope
or toe of the the slope

Limit of the roadway :
Outer edge of the Emergency stoppingLane or of
the Outer Shoulder

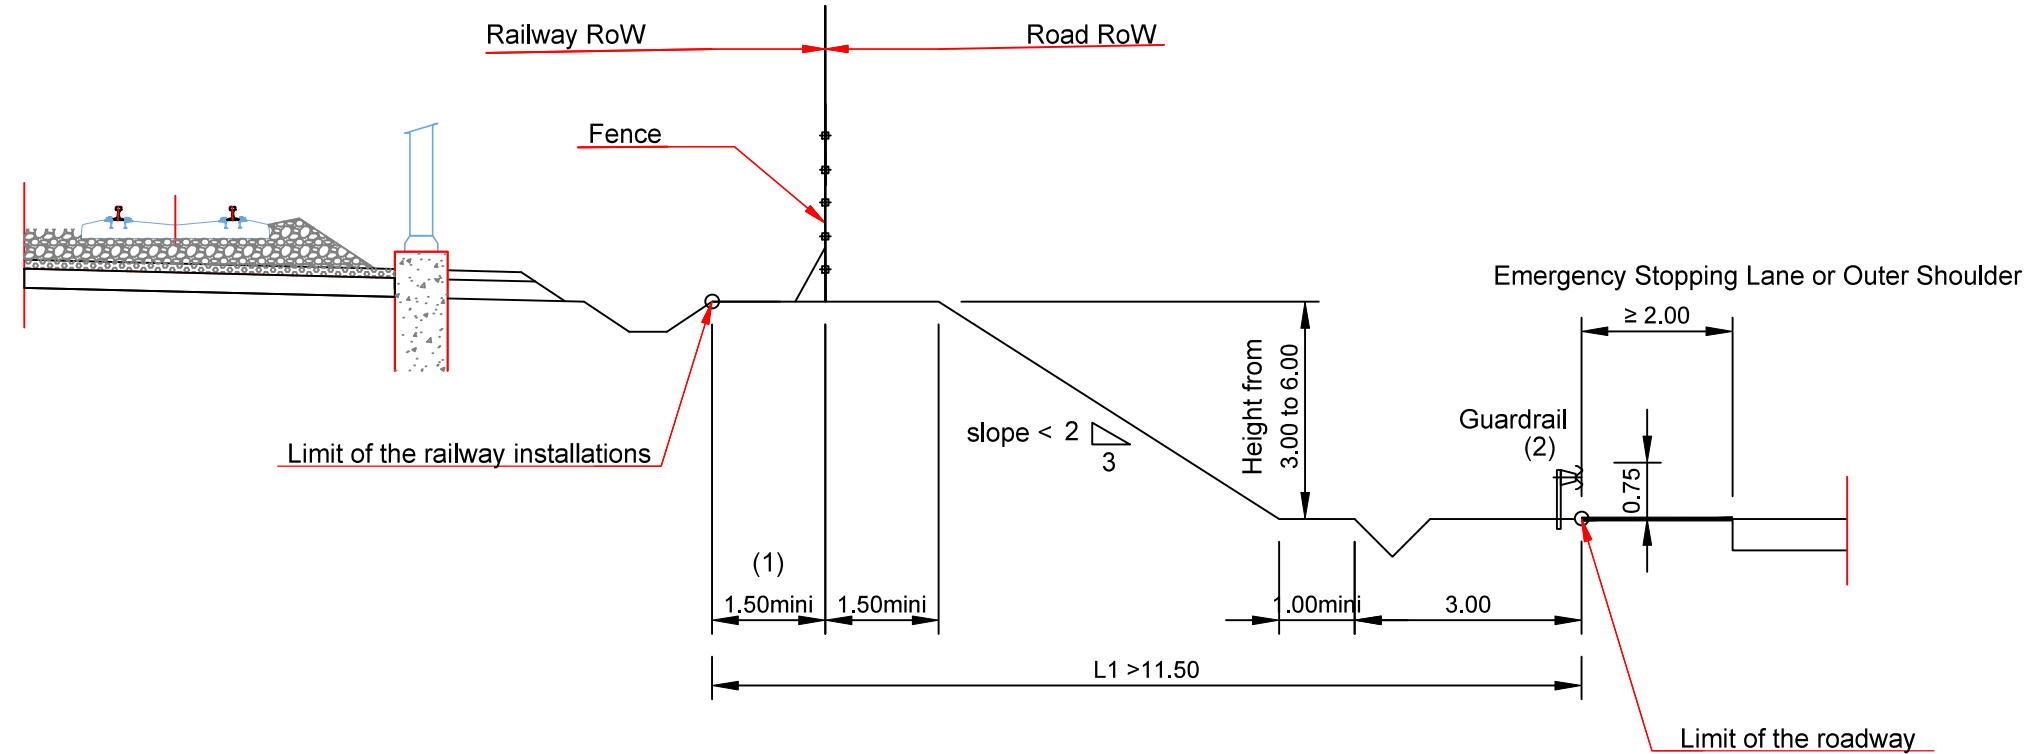

(1) 4,50 m recommended
(2) Safety device with minima N2 level

Scale : 1/100

<div><div><div><div></div><div>Rail Baltica</div></div><div><div>SYSTRA</div><div></div></div></div><div><div><div>Rail Baltica</div><div>Preliminary design for the Rail Baltic 1,435 mm gauge line</div></div></div></div>									DRAWING DESCRIPTION	Typical Cross Section Main Line								
	A3	16/03/2018	Minor corrections	DAN	CCA	EFA												
	A2	10/01/2018	Corrections followings comments	DAN	CCA	EFA	SCALE	1 / 100										
	A1	20/10/2017	First Edition	DAN / VEB	CCA	EFA	PAGE	XX/XX		FILE NAME	RBDG - DWG - 0 5 8 A 3							
	-----	DATE	REVISION DESCRIPTION	DRAWN BY	CHECK BY	APPROVED BY												