


Twining with high traffic roads
Railway lower than the roadway or higher with a height difference $\leq 3\text{m}$

1st case : $2m \leq L1 < 6m$ - solution 2 for twinning area close to 6m

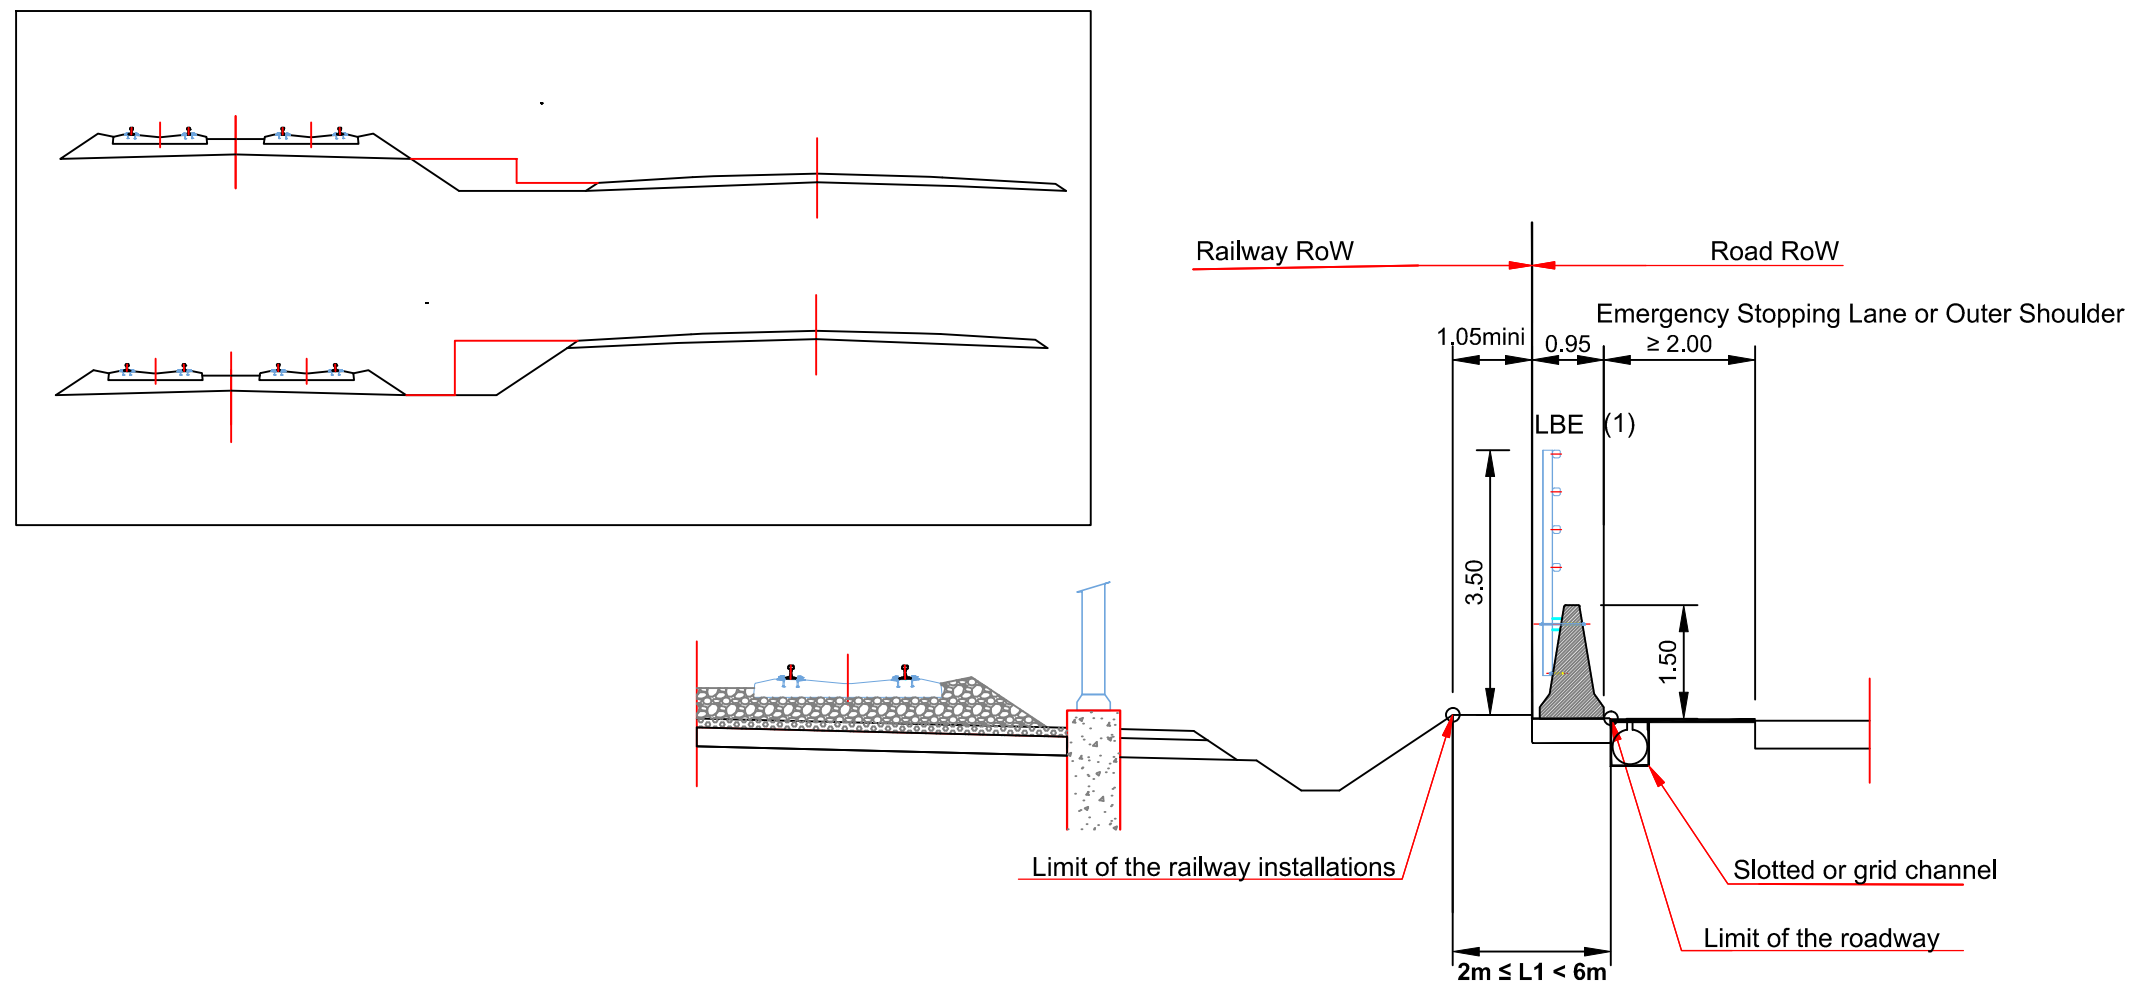

Limit of the railway installations :

Outer drainage limit
or ridge of the cut-off slope
or toe of the the slope

Limit of the roadway :

Outer edge of the Emergency stopping Lane or of the Outer Shoulder

(1) LBE : Special separator + concrete barrier with H3/H4a/H4b level

Scale : 1/100

								DRAWING DESCRIPTION	Typical Cross Section Main Line							
A2	10/01/2018	Corrections followings comments	DAN	CCA	EFA	SCALE	1 / 100									
A1	20/10/2017	First Edition	DA / VEB	CCA	EFA											
-----	DATE	REVISION DESCRIPTION	DRAWN BY	CHECK BY	APPROVED BY	PAGE	XX/XX	FILE NAME	RBDG - DWG	-	0	5	1	A	2	